


INDEX OF DRAWINGS		
SHEET NO.	SHEET I.D.	SHEET DESCRIPTION
1	G001	COVER SHEET
2	G002	INDEX OF DRAWINGS AND SUMMARY OF APPROXIMATE QUANTITIES
3	G003	GENERAL NOTES
4	G004	MASTER LEGEND AND ABBREVIATIONS
5	G005	SURVEY CONTROL PLAN
6	G050	CONSTRUCTION SAFETY OVERALL PHASING PLAN
7	G051	CONSTRUCTION SAFETY NOTES
8	G052	CONSTRUCTION SAFETY INDIVIDUAL PHASING PLAN
9	G070	ENVIRONMENTAL REQUIREMENTS AND NOTES
10	C200	GEOMETRY PLAN
11	C201	GEOMETRY PLAN
12	C202	GEOMETRY PLAN
13	C203	GEOMETRY PLAN
14	C220	PAVEMENT TYPICAL SECTIONS
15	C250	GEOMETRY DETAILS AND NOTES
16	C251	GEOMETRY DETAILS AND NOTES
17	C252	GEOMETRY DETAILS AND NOTES
18	C300	GRADING PLAN AND PROFILE
19	C800	EROSION CONTROL PLAN
20	C801	EROSION CONTROL PLAN
21	C850	EROSION CONTROL DETAILS AND NOTES
22	E200	ELECTRIC GEOMETRY PLAN
23	E250	ELECTRIC GEOMETRY DETAILS AND NOTES

SUMMARY OF APPROXIMATE QUANTITIES						
ITEM NO.	ITEM DESCRIPTION	UNITS	SCHEDULE I		SCHEDULE II	
			ESTIMATE	AS BUILT	ESTIMATE	AS BUILT
C-105a	Mobilization	LS	1		1	
P-152a	Unclassified Excavation (4") for Gravel Parking Lots	CY	0		105	
P-152b	Subgrade Preparation (12") for Gravel Parking Lots	CY	0		300	
MO-310a	Aggregate Surface for Gravel Parking Lots	CY	0		105	
F-162a	Install 6-Foot Chain Link Fence, Complete	LF	2,400		0	
F-162b	Install Automatic 20-Foot Swing Gate with Keypad and Concrete Pad, Complete	EA	2		0	
F-162c	Install Automatic 24-Foot Slide Gate with Keypad and Concrete Pad, Complete	EA	1		0	
F-162d	Install 4-foot Pedestrian Gate	EA	5		0	
F-162e	Install 16-Foot Manual Vehicle Swing Gate, Complete	LS	1		0	
T-901a	Seeding	AC	1		0	

EARTHWORK SUMMARY		
AREA DESCRIPTION	CUT (CY)	FILL (CY)
SCHEDULE I		
AREA 1	231	0
SCHEDULE I SUBTOTAL		0
SCHEDULE II		
AREA 1	45	24
AREA 2	28	34
AREA 3	22	27
SCHEDULE II SUBTOTAL		85
SCHEDULES I & II NET SUBTOTAL		0

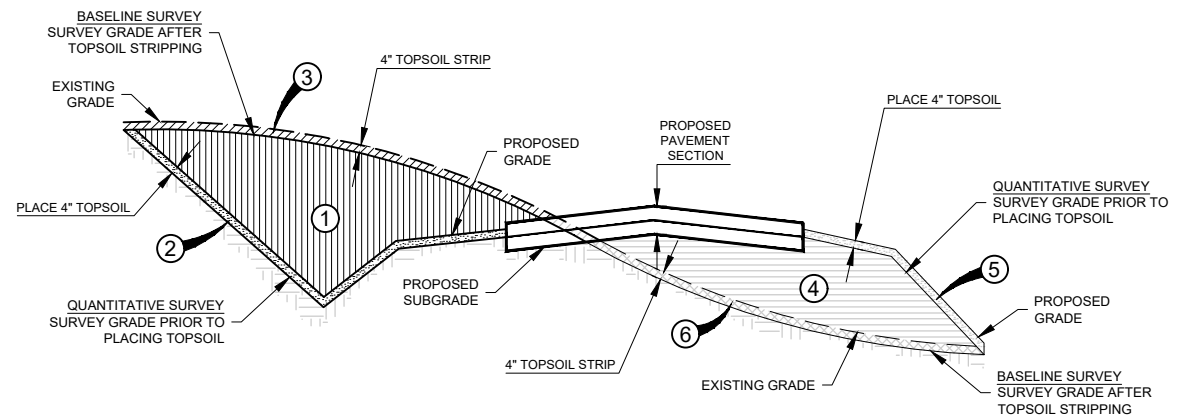


TOTAL EXCAVATION (PAY)

- ① UNCLASSIFIED EXCAVATION VOLUME
- ② TOPSOIL VOLUME AT EXCAVATION (PLACED)
- ③ TOPSOIL VOLUME AT EXCAVATION (STRIPPED)

TOTAL EMBANKMENT (NO PAY)

- ④ EMBANKMENT VOLUME (FROM ONSITE OR BORROW SOURCE)
- ⑤ TOPSOIL VOLUME AT EMBANKMENT (PLACED)
- ⑥ TOPSOIL VOLUME AT EMBANKMENT (STRIPPED)



EARTHWORK CALCULATIONS DETAIL (EXCAVATION)

NOT TO SCALE

ISSUED FOR BID

THESE DRAWINGS ARE FOR BIDDING PURPOSES ONLY. THEY WERE PREPARED BY OR UNDER THE SUPERVISION OF:

LAURA K. KOONCE 2022012014 08/17/2023
NAME REG. NO. DATE
FOR AND ON BEHALF OF JVIATION, INC.

Printed August 17, 2023 @ 1:56 PM by: Koonce, Laura
C:\MANA\23\07\06\1 Apron Perimeter Fencing\CAD\PLANS\00-MAN\FENC-G002-INDX.dwg



DES: N.B.B.	ISSUE RECORD			
	NO.	BY	DATE	DESCRIPTION
DR: N.B.B.	1	L.K.K.	08/17/2023	ISSUED FOR BID
CH: C.L.G.				
APP: L.K.K.				

APRON PERIMETER FENCING

INDEX OF DRAWINGS AND SUMMARY OF APPROXIMATE QUANTITIES

MoDOT PROJ. NO. 23-079A-1

JVIATION PROJ. NO. 10016990

SHEET NAME

G002

SHEET NO.

2 of 23