



SUMMARY OF APPROXIMATE QUANTITIES

ITEM NO.	ITEM DESCRIPTION	UNITS	SCHEDULE I		SCHEDULE II	
			ESTIMATE	AS BUILT	ESTIMATE	AS BUILT
C-100a	CONTRACTOR QUALITY CONTROL PROGRAM (CQCP)	LS	1	0	1	0
C-105a	MOBILIZATION	LS	1	0	1	0
P-101-5.1a	CONCRETE PAVEMENT REMOVAL (COMPLETE)	SY	20,940	0	370	0
P-101-5.1b	ASPHALT PAVEMENT REMOVAL (COMPLETE)	SY	910	0	1,920	0
P-101-5.1c	ASPHALT PAVEMENT REMOVAL (BUTT JOINT)	SY	930	0	0	0
P-101-5.2a	CONCRETE PAVEMENT JOINT REMOVAL, REPAIR, AND REPLACEMENT	LF	52,860	0	6,260	0
P-101-5.2b	CONCRETE PAVEMENT CRACK REPAIR	LF	1,000	0	100	0
P-101-5.3a	CONCRETE PAVEMENT SPALL REPAIR	SF	1,000	0	100	0
P-101-5.4a	REMOVE EXISTING TRENCH DRAIN	LS	1	0	0	0
P-101-5.4b	REMOVE EXISTING STORM INLET	EA	5	0	0	0
P-152-4.1a	UNCLASSIFIED EXCAVATION	CY	20,110	0	780	0
P-152-4.1b	UNCLASSIFIED EXCAVATION (OVEREXCAVATION)	CY	1,460	0	160	0
P-152-4.2a	EMBANKMENT IN PLACE (SUBGRADE PREPARATION)	SY	20,940	0	2,280	0
P-154-5.1a	SUBBASE COURSE	CY	11,760	0	190	0
P-154-5.2a	SEPARATION FABRIC	SY	21,980	0	370	0
P-209-5.1a	CRUSHED AGGREGATE BASE COURSE	CY	3,650	0	520	0
P-306-8.1a	LEAN CONCRETE BASE COURSE	SY	20,940	0	370	0
P-401-8.1a	ASPHALT MIX PAVEMENT (3/4-INCH MIX)	TON	2,030	0	680	0
P-501-8.1a	CEMENT CONCRETE PAVEMENT (13-INCH)	SY	20,940	0	370	0
P-603-5.1a	EMULSIFIED ASPHALT TACK COAT	GAL	1,500	0	500	0
P-605-5.1a	JOINT SEALING FILLER FOR CONCRETE PAVEMENT	LF	30,390	0	710	0
P-620-5.1a	SURFACE PREPARATION	LS	1	0	1	0
P-620-5.2a	PERMANENT PAVEMENT MARKING	SF	25,000	0	2,000	0
P-620-5.3a	GLASS BEADS	LS	1	0	1	0
P-640-5.1a	INSTALL NEW AIRCRAFT TIEDOWN ANCHOR	EA	6	0	0	0
D-701-5.1a	INSTALL 12-INCH REINFORCED CONCRETE PIPE, CLASS V	LF	610	0	0	0
D-705-5.1a	INSTALL 6-INCH PVC PIPE UNDERDRAIN	LF	1,570	0	0	0
D-750-5.1a	INSTALLATION OF TRENCH DRAIN (CAST-IN-PLACE)	LF	2,200	0	0	0
D-751-5.3a	INSTALL AIRCRAFT RATED DOUBLE INLET	EA	5	0	0	0
D-751-5.4a	INSTALL UNDERDRAIN CLEANOUT	EA	12	0	0	0
L-108-5.1a	INSTALL #8 AWG, L-824C, 5000V, WIRE	LF	1,050	0	0	0
L-108-5.2a	INSTALL #6 AWG BARE COPPER COUNTERPOISE INCLUDING GROUNDING RODS AND TERMINATIONS	LF	525	0	0	0
L-110-5.1a	INSTALL 1-2" PVC DUCT, DIRECT EARTH BURIED (DEB)	LF	475	0	0	0
L-110-5.2a	INSTALL 1-2" PVC DUCT IN EXISTING PAVEMENT, CONCRETE ENCASED (CE)	LF	30	0	0	0
L-125-5.1a	INSTALL NEW LIGHTED L-858 LED GUIDANCE SIGN ON NEW FOUNDATION	EA	2	0	0	0

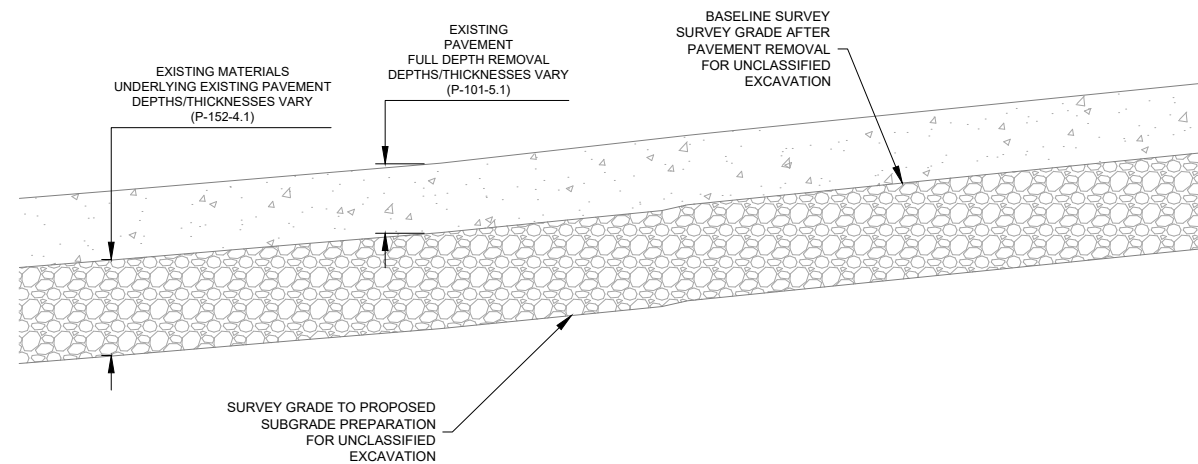

1 CALCULATIONS DETAIL (REMOVAL OF EXISTING MATERIALS)
NOT TO SCALE

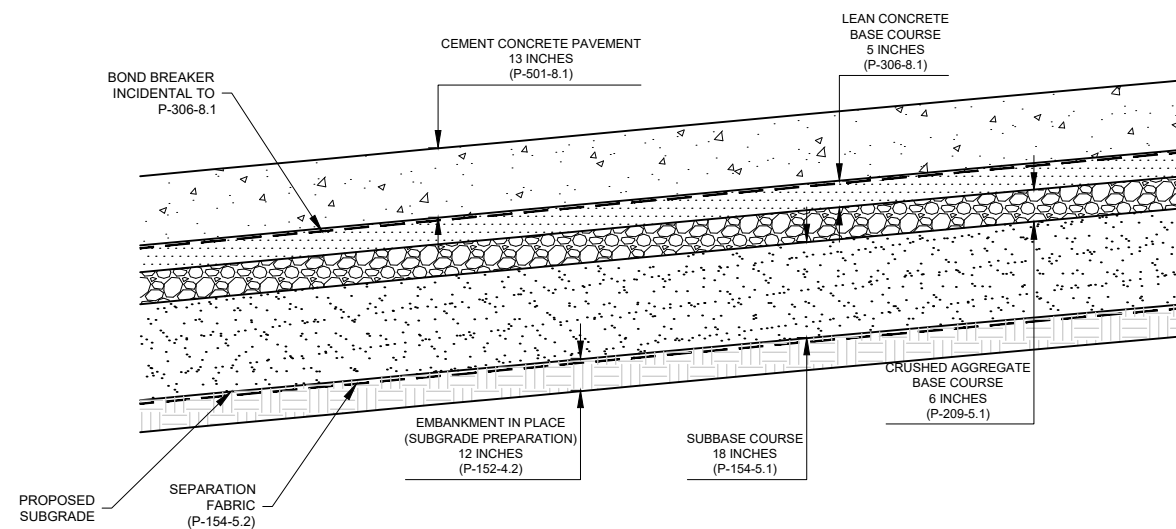

2 CALCULATIONS DETAIL (PROPOSED PAVEMENT MATERIALS)
NOT TO SCALE

Plotted May 17, 2019 @ 2:24 PM by: Fernando Valencia
 C:\PRC\059\Apron RSR\Rehab\0501\PLANS\0500\CPR-059-G005-QTYS.dwg



DES: DESIGNED	ISSUE RECORD			
	NO.	BY	DATE	DESCRIPTION
DR: DRAFTED	1	M.J.L.	05/20/19	ISSUED FOR BID
CH: C.L.G.				
APP: M.J.L.				

REHABILITATE AND REPAIR APRON AND
INSTALL LIGHTED "DO NOT ENTER" SIGNS
FOR ABANDONED RUNWAY 17/35

SUMMARY OF
APPROXIMATE QUANTITIES

AIP PROJ. NO.
3-56-0004-059-2019

JVIAATION PROJ. NO.
2018.CPR.01

SHEET NAME

G005

SHEET NO.

06 of 101